

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 238 988 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
12.01.2005 Bulletin 2005/02

(51) Int Cl.7: **C08F 4/34**, C07C 409/34,
C07D 317/42, C07D 317/32

(21) Application number: **02004181.0**

(22) Date of filing: **26.02.2002**

(54) Perfluorodiacylperoxides as polymerization initiators

Perfluorodiacylperoxide als Polymerisationsinitiatoren

Perfluordiacylperoxydes comme initiateurs de polymérisation

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **08.03.2001 IT MI010482**

(43) Date of publication of application:
11.09.2002 Bulletin 2002/37

(73) Proprietor: **Solvay Solexis S.p.A.**
20121 Milano (IT)

(72) Inventors:
• **Navarrini, Walter**
20010 Boffalora Ticino, Milano (IT)

• **Galimberti, Marco**
20021 Bollate, Milano (IT)

(74) Representative: **Sama, Daniele, Dr.**
Sama Patents,
Via G.B. Morgagni, 2
20129 Milano (IT)

(56) References cited:
EP-A- 0 606 492 **WO-A-01/16100**
WO-A-91/00272

EP 1 238 988 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to perfluorodiacylperoxides used as polymerization initiators in a wide temperature range.

[0002] Specifically the invention relates to perfluorodiacylperoxides obtainable with good yields from the respective perfluoroacylfluorides and having a high hydrolytic stability, in particular when used as polymerization initiators in aqueous medium. The high hydrolytic stability of said initiators confers to the polymerization process improved yields while the perfluorinated structure of the initiator allows to obtain polymers having stable perfluoroalkyl end groups.

[0003] The use as polymerization initiators of halogenated diacylperoxides is known in the prior art. These compounds can be obtained by synthesis from the respective acyl-halides, using various methods described in the literature. The perfluorodiacylperoxide synthesis from the respective perfluoroacyl-halides in the presence of H_2O_2 and NaOH is described, for example, by H. Sawada in Chemical Review, 1996, Vol.96, 1779-1808. In the prior art to synthesize perfluorodiacylperoxides, perfluoroacylchlorides are preferably used since they are more reactive than the corresponding perfluoroacylfluorides. In fact, perfluoroacylfluorides determine lower synthesis yields than the corresponding chlorides. Besides, the obtained perfluorodiacylperoxides cause secondary reactions since they are easily hydrolyzed by the reaction medium wherein they are produced.

[0004] The perfluorodiacylperoxides exemplified in the prior art as polymerization initiators give low yields when used in polymerization processes in aqueous medium. To overcome this drawback one can polymerize in the presence of solvent. However the polymerization in solvent is more expensive than that in aqueous medium. Besides, it is necessary to use particular solvents which have no environmental impact, otherwise supplementary units would be necessary for their treatment. Besides, the polymerization in aqueous medium allows to generally obtain higher polymerization yields and a better control of the molecular weights of the polymers.

[0005] From the industrial point of view it is therefore advantageous to polymerize in aqueous medium using initiators which are not hydrolyzed in the reaction medium. On the other hand non fluorinated initiators are known, for example ammonium persulphate, which have a good hydrolytic stability, thus allowing the water polymerization with good yields. However these initiators have the drawback to lead to polymers having unstable end groups and therefore unusable in applications where a high stability and a high purity degree of the final polymer are required, for example in optical applications. For these uses it would be necessary to treat them to obtain stable end groups.

[0006] In GB 781,532 it is described the polymerization of perfluoro-olefins using perfluorinated or chlorofluorinated solvents in the presence of initiators. In said patent it is pointed out how the use of perfluorinated peroxides as polymerization initiators in aqueous medium is not possible since the presence of water determines the deactivation of the peroxide itself already at temperatures higher than 0°C.


[0007] USP 3,671,510 points out how the perfluorodiacylperoxides are hydrolyzed in the presence of water, wherefore the initiator efficiency is strongly compromised and therefore the monomer conversion is notably reduced. To overcome these inconveniences, this patent suggests the use of (perchlorofluoro)-di-acylperoxides as polymerization initiators in aqueous medium. However, the use of said peroxides implies the drawback to give polymers having unstable end groups with the above disadvantages.

[0008] EP 606,492 refers to a polymerization process in aqueous phase of tetrafluoroethylene with hexafluoropropene, wherein difluoroacylperoxides are used as polymerization initiators in the presence of suitable perfluoroalkyl-carboxylic acids. Said perfluoroalkylcarboxylic acids decrease the tendency to hydrolysis of perfluoroacylperoxides. However, by operating in acid medium there is the drawback to have a poor stability of the obtained polymer latex.

[0009] The easiness to hydrolysis of perfluorodiacylperoxides is more stressed for the compounds having a low molecular weight, see Sawada et al in Chem. Abs. Vol. 112:117996b and patent application WO 97/08142. Said patent application describes a synthesis method to limit the tendency to hydrolysis of the obtained perfluorodiacylperoxides. The process variables, for example reaction temperature, contact time among reactants, mixing and ratio among reactants, must be very carefully determined and strictly maintained constant during the process. To maintain these variables in the narrow range useful to avoid hydrolysis, one uses complicated equipments, as ultrasound systems or micro-ejectors. The drawback of the described process resides in that it is difficult to bring it on an industrial scale.

[0010] The Applicant has surprisingly found perfluorodiacylperoxides having end groups with branched or cyclic structure, which are not hydrolyzed in aqueous medium for long times at the corresponding temperatures of thermal decomposition. Depending on their decomposition temperature they are usable as polymerization initiators in a wide temperature range, from -20°C to 100°C, and they allow to obtain improved yields (see the comparative Examples).


[0011] An object of the present invention are therefore perfluorodiacylperoxides having the following structures:

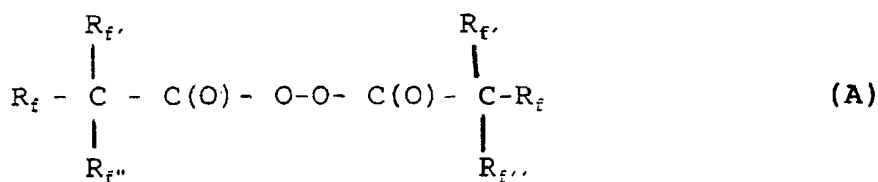

wherein:

when R_f is F, $R_{f'}, R_{f''}$ are both $-CF_3$;


when R_f is $-CF_3$, $R_{f'}, R_{f''}$ are C_1 - C_3 linear or branched perfluoroalkyl groups;

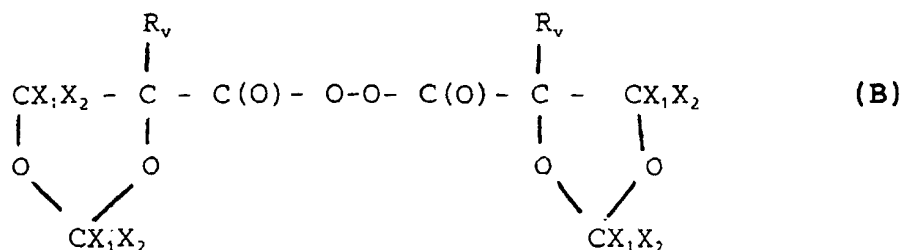

wherein:

R_v is selected from F, perfluoroalkyl, C_1 - C_3 linear or branched perfluoroalkyl;

X_1, X_2 are selected from F, perfluoroalkyl, C_1 - C_3 linear or branched perfluoroalkyl.

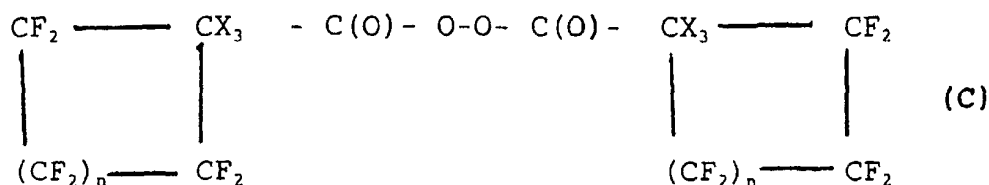

wherein:

$n = 1-3$

X_3 is selected from F, C_1 - C_3 linear or branched perfluoroalkyl, with the proviso that for $n = 3$, X_3 cannot be F;

said perfluorodiacylperoxides meet the following condition: the thermal decomposition constants K_d (sec^{-1}) in the presence of water do not undergo substantial variations with respect to the thermal decomposition constants in absence of water.

[0012] This means that the perfluorodiacylperoxides of the invention can be used as initiators in aqueous polymerization without any variation of the half-life times determined under anhydrous conditions. Therefore the invention compounds can be used also after storage in aqueous emulsion for long times, even over 2-3 days, without undergoing any hydrolytic decomposition. This represents a further advantage from the industrial point of view since there is no need of immediate use of the acylperoxide differently from what happens for the acylperoxides known in the prior art.

[0013] The perfluorodiacylperoxides of the invention are obtained by synthesis of the corresponding perfluoroacylhalides in the presence of H_2O_2 and NaOH. In particular, they can be prepared by addition of perfluoroacylfluorides to a biphasic system formed by a halogenated solvent and by an aqueous solution containing H_2O_2 and an alkaline metal hydroxide, such as for example NaOH, KOH. The halogenated solvent can be 1,1,2-trichloro-1,2,2-trifluoroethane, trichlorofluoromethane, perfluoroheptane, perfluoropolyethers. The fed amounts of perfluoroacylfluoride range from 0.5


to 2 moles per mole of H_2O_2 ; the amount of alkaline metal hydroxide is in the range 0.8-1.5 moles per mole of perfluoroacylfluoride. The system is maintained under stirring in a temperature range from -15°C to 20°C , preferably from -5°C to $+5^\circ\text{C}$. The organic phase containing the reaction products in solution is recovered from the aqueous phase by separation. A washing step with water of the organic phase and subsequent anhydridification with sodium sulphate follows.

[0014] A further object of the present invention is a polymerization process in solvent or in aqueous medium of one or more fluorinated monomers wherein as polymerization initiators the above perfluorodiacylperoxides are used.

[0015] As polymerization solvents, fluorinated solvents, preferably (per)fluoroalkanes or (per)fluoropolyethers are used.


[0016] As said the compounds of the invention can be used in a wide temperature range depending on the polymerization type. This is possible since the perfluorodiacylperoxides of the invention decompose in a surprisingly wide temperature range. For example, in the preparation of vinylidene fluoride (VDF)-based polymers it is preferable to use low polymerization temperatures (0°C - 10°C). Viceversa, in the case of copolymers having a high content of not very reactive monomers, as in the case of copolymers of 2,2,3-trifluoro-4-tri-fluoromethoxy-1,3-dioxole (TTD), it is preferable to carry out the polymerization at higher temperatures (higher than 50°C).

[0017] In particular for the polymerization reactions at temperatures of the order of 50°C - 80°C , the compounds of structure (C) or the compound of structure (A) having the formula:

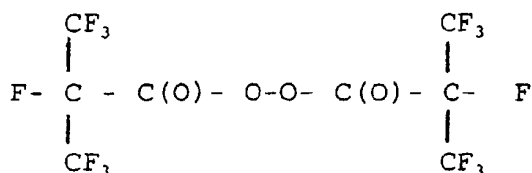

are preferably used.


[0018] For the polymerization reactions at low temperature, of the order of -20° - $+25^\circ\text{C}$, the compounds of structure (A) of formula:

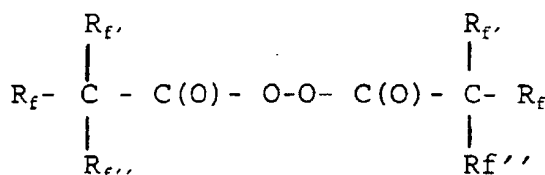

are preferably used, wherein when R_f is $-\text{CF}_3$, R_f' and R_f'' are C_1 - C_3 linear or branched perfluoroalkyl groups. Said acylperoxides of group (A) can furthermore be used as polymerization initiators in solvent at a temperature lower than 0°C .

[0019] As fluorinated monomers polymerizable in the presence of the perfluorodiacylperoxides of the invention, we can mention:

- C_2 - C_8 perfluoroolefins, such as tetrafluoroethylene (TFE), hexafluoropropene (HFP);
- C_2 - C_8 hydrogenated fluoroolefins, such as vinyl fluoride (VF), vinylidene fluoride (VDF), trifluoroethylene, $\text{CH}_2=\text{CH}-\text{R}_f$ perfluoroalkylethylene, wherein R_f is a C_1 - C_6 perfluoroalkyl, hexafluoroisobutene;
- C_2 - C_8 chloro-fluoroolefins, such as chlorotrifluoroethylene (CTFE);
- $\text{CF}_2=\text{CFOR}_f$ (per)fluoroalkylvinylethers (PAVE), wherein R_f is a C_1 - C_6 (per)fluoroalkyl, for example CF_3 , C_2F_5 , C_3F_7 ;
- $\text{CF}_2=\text{CFOX}$ (per)fluoro-oxyalkylvinylethers, wherein X is: a C_1 - C_{12} alkyl, or a C_1 - C_{12} oxyalkyl, or a C_1 - C_{12} (per)fluoroalkyl having one or more ether groups, for example perfluoro-2-propoxy-propyl;
- perfluorodioxoles, such as 2,2,4-trifluoro-5-trifluoromethoxy-1,3-dioxole (TTD), 2,2-bis-trifluoromethyl-4,5-difluorodioxole (PPD);
- sulphonic monomers, such as for example $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{SO}_2\text{F}$;
- fluorinated dienes as for example $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{CF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCCl}_2\text{CF}_2\text{CF}=\text{CF}_2$,



[0020] The polymerization in aqueous medium can be carried out in suspension, in emulsion or in microemulsion in the presence of the perfluorodiacylperoxides of the invention acting as initiators. The initiator feeding procedures can be in a continuous way or by a single addition at the starting of the polymerization. The amount of perfluorodiacylperoxide initiator is in the range 0.0001%-5% by moles with respect to the amount of the fed monomers.

[0021] The polymerization temperature can be in the range from -20°C to 80°C at pressures comprised between 2 and 50 bar.


[0022] In the case of polymerization in aqueous emulsion, the presence of a surfactant is necessary, the fluorinated surfactants such as perfluorooctanoate or mixtures of ammonium, potassium or sodium perfluorooctanoate, perfluorooxonanoate, perfluorodecanoate are particularly preferred. It is particularly suitable to carry out the polymerization in aqueous phase in the presence of perfluoropolyethers as surfactants. Said perfluoropolyethers can be added to the reaction medium under the form of microemulsion, as described in USP 4,864,006.

[0023] The present invention will now be better illustrated by the following Examples.

EXAMPLES

EXAMPLE 1

[0024] Synthesis of the compound

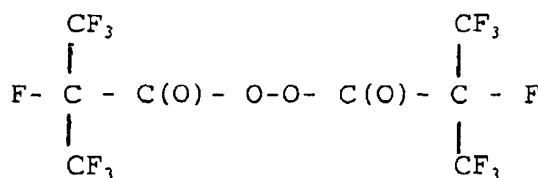

[0025] 48.7 mmoles of NaOH (1.95 g) which are dissolved in 15 ml of distilled water are introduced in a four-necked flask equipped with mechanical stirrer, solid CO₂ condenser, thermometer and dropping funnel. 50 ml of CCl₂FCClF₂ solvent are added and then the temperature of the system is lowered by a cold bath to about 0°C. 4.6 ml of H₂O₂ at 57.5% (corresponding to 94 mmoles of H₂O₂) are introduced and then, by the dropping funnel, 47 mmoles of (CF₃)₂CFCOF (10.2 g) are introduced. The system temperature passes from 0°C to 8°C; the exothermic value of the reaction is controlled by the cold bath, maintaining the temperature at about 2°C. After 10 minutes the flask content is transferred into a separatory funnel and the organic phase is washed with distilled water until a neutral pH, then it is anhydriified with anhydrous Na₂SO₄. The peroxide concentration in CCl₂FCClF₂ is determined by iodometric titration. The reaction yield is 70%.

Characterization of the compound [(CF₃)₂CFCOO]₂

[0026] NMR¹⁹F spectrum (with respect to CFCI₃=0)

-184 ppm 1F; -75 ppm 6F

IR spectrum main bands (cm⁻¹);

intensity: (w) = weak; (m) = mean; (s) = strong; (vs) = very strong:

1853 (m), 1824 (m), 1309 (m), 1264 (s)

Mass spectrum (E.I. electronic impact), main peaks and respective intensities:

319 (3), 281 (3), 231 (5), 181 (5), 131 (5), 69 (100)

Decomposition constants

[0027] The thermal decomposition constants K_d (sec⁻¹) of the perfluorodiacylperoxide of the invention are determined under anhydrous conditions at different temperatures, equal to 60°C, 70°C, 80°C.

[0028] By using as solvent CCl₂FCClF₂ and a peroxide concentration equal to 6% by weight, the following results are obtained:

K_d = 4.4·10⁻⁵ (60°C); 16.2·10⁻⁵ (70°C); 57.8·10⁻⁵ (80°C).


[0029] Subsequently it is seen that the decomposition constants, determined at the same temperatures of 60°C,

70°C and 80°C, introducing 0.5 ml of H₂O per ml of peroxidic solution under magnetic stirring and titrating the organic layer, do not undergo significant variations with respect to the respective above reported thermal decomposition constants.

[0030] Besides the pH of the aqueous phase, during the described hydrolytic decomposition, remains unchanged and the only decomposition products are: CO₂ and (CF₃)₂CFCF(CF₃)₂.

EXAMPLE 2

[0031] Synthesis of the compound

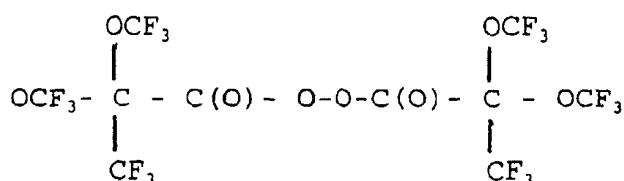

[0032] The synthesis procedure is equal to that used in Example 1 with the following quantitative modifications: 26 mmoles of (CF₃)(CF₃O)₂CCOF (7.8 g), 35 mmoles of NaOH (1.39 g), 15 ml of bidistilled water, 3.0 ml of H₂O₂ at 57.5% (62 mmoles) and 50 ml of CCl₂FCClF₂ solvent.

[0033] It is let react for 90 min, following the acylfluoride disappearance by IR analysis. The reaction yield is 46%.

Characterization of the compound [(CF₃)(CF₃O)₂CCOO]₂

[0034] NMR¹⁹F spectrum (with respect to CFCF₃ = 0) :

-59 ppm 6F, -82 ppm 3F

IR spectrum main bands (cm⁻¹) :

intensity: (w) = weak; (m) = mean; (s) = strong; (vs) = very strong:

1854 (m), 1828 (m), 1287 (s), 1254 (s)

Mass spectrum (E.I electronic impact), main peaks and respective intensities:

263 (6), 251 (3), 135 (2), 97 (4), 69 (100)

Decomposition constants

[0035] Decomposition constants K_d (sec⁻¹) and respective temperatures determined under anhydrous conditions (CCl₂FCClF₂ as solvent):


K_d = 1.8 · 10⁻⁵ (5°C); 7.6 · 10⁻⁵ (15°C); 46.2 · 10⁻⁵ (25°C).

[0036] The decomposition constant in the presence of water is determined at the temperature of 15°C, maintaining under magnetic stirring 8 ml of peroxidic solution and 8 ml of water and titrating the organic layer. No significant variation is noticed with respect to the respective thermal decomposition constant in absence of water.

EXAMPLE 3

Synthesis of the compound

[0037]

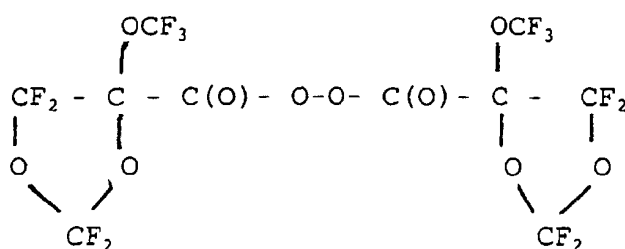

[0038] The synthesis procedure is equal to that used in Example 1 with the following quantitative modifications: 23 mmoles of acylfluoride (6.4 g), 25 mmoles of NaOH (0.99 g), 16 ml of bidistilled water, 2.1 ml of H₂O₂ at 57.5% (43 mmoles) and 45 ml of CCl₂FCClF₂ solvent. The reaction yield is 56%.

5 Characterization of the compound

[0039] NMR¹⁹F spectrum (with respect to CFCI₃ = 0):

-55 ppm 1F, -56 ppm 3F, -59 ppm 1F, -75 ppm 1F, -90 ppm 1F

IR spectrum main bands (cm⁻¹) ;

intensity: (w) = weak; (m) = mean; (s) = strong; (vs) = very strong:

1857 (m), 1828 (m), 1349 (m), 1236 (s)

Mass spectrum (E.I. electronic impact), main peaks and respective intensities:

229 (42), 163 (21), 135 (7), 116 (3), 97 (30), 78 (4), 69 (100), 50 (6)

15 Decomposition constants

[0040] Decomposition constants K_d (sec⁻¹) and respective temperatures determined under anhydrous conditions (CCl₂FCClF₂ as solvent):

K_d = 3.1 · 10⁻⁵ (20°C); 11.7 · 10⁻⁵ (30°C); 50.2 · 10⁻⁵ (40°C).

[0041] The decomposition constant in the presence of water is determined at the temperature of 30°C, maintaining under magnetic stirring 8 ml of peroxidic solution and 8 ml of water and titrating the organic layer. No significant variation is noticed with respect to the respective thermal decomposition constant in absence of water.

EXAMPLE 4

[0042] The perfluorodiacylperoxide ((CF₃)₂CF₂COO)₂ obtained in Example 1 is used as polymerization initiator in suspension for the preparation of the vinylidene fluoride (VDF) homopolymer.

[0043] 0.12 mmoles of ((CF₃)₂CF₂COO)₂ dissolved in CCl₂FCClF₂ (1.2 ml) and 20 ml of bidistilled water are introduced into a 50 ml steel reactor, equipped with magnetic stirrer. The so charged reactor is subjected to three cycles reaching the room temperature, condensation in liquid nitrogen, and evacuation at the pressure of 10⁻³ mbar to remove oxygen traces. At the end of these steps 22 atm of VDF are introduced into the reactor and then the system is maintained, under magnetic stirring, at the temperature of 57°C.

[0044] When the pressure in the autoclave decreases to 15 atm one provides for the monomer restoration up to the value of 20 atm. After 48 hours the unreacted monomer is removed, obtaining 3.3 g of homopolymer equivalent to a 90% yield.

EXAMPLE 5 (comparative)

[0045] One proceeds as in Example 4, but using the peroxide having a linear structure [CF₃CF₂CF₂OCF(CF₃)CF₂OCF(CF₃)COO]₂ instead of the perfluoroacylperoxide ((CF₃)₂CF₂COO)₂ of the invention. While maintaining all the other reaction parameters equal, 0.5 g of VDF homopolymer, equivalent to a yield of 16%, are obtained.

EXAMPLE 6

[0046] The perfluorodiacylperoxide of formula [(CF₃O)₂(CF₃)CCOO]₂ obtained in Example 2 is used as polymerization initiator in solution for the preparation of the vinylidene fluoride (VDF) homopolymer.

[0047] 0.15 mmoles of [(CF₃O)₂(CF₃)CCOO]₂ dissolved in CCl₂FCClF₂ (1.4 ml) and 8.6 ml of perfluoropolyether solvent GALDEN® LS-155 are introduced into a 50 ml steel reactor, equipped with magnetic stirrer. The so charged reactor is subjected to three cycles reaching the room temperature, condensation in liquid nitrogen, and evacuation at the pressure of 10⁻³ mbar to remove oxygen traces. At the end of these steps the reactor is heated to 5°C and then gaseous VDF is introduced until the monomer dissolved in the solvents is in equilibrium with a pressure of 15 atm of gaseous monomer. The system is maintained, under magnetic stirring, at the temperature of 5°C for one hour, at the end of which the unreacted monomer is outgassed obtaining, after thermal treatment at 120°C under vacuum for 5 hours, 3.3 g of VDF homopolymer equivalent to a 65% yield.

EXAMPLE 7 (comparative)

[0048] One proceeds as in Example 6, but using the peroxide having a linear structure [CF₃CF₂CF₂OCF(CF₃)

$\text{CF}_2\text{OCF}(\text{CF}_3)\text{COO}]_2$ instead of the peroxide $[(\text{CF}_3\text{O})_2(\text{CF}_3)\text{CCOO}]_2$ of the invention. While maintaining all the other reaction parameters equal, 1.5 g of VDF homopolymer, equivalent to a 29% yield, are obtained.

EXAMPLE 8

[0049] The peroxide $[(\text{CF}_3)_2\text{CFCOO}]_2$ obtained in Example 1 is used as polymerization initiator in emulsion for preparing the VDF homopolymer.

[0050] In this and in all the subsequent Examples of polymerization in emulsion, with "emulsifier" a microemulsion salified with sodium is meant, prepared according to USP 4,846,006 in the name of the Applicant.

[0051] 0.106 g of emulsifier and 10.030 g of bidistilled water and then, after a short stirring, 1 ml of a peroxide solution in $\text{CCl}_2\text{FCClF}_2$ solvent containing 0.15 mmoles of $[(\text{CF}_3)_2\text{CFCOO}]_2$ are introduced into a 50 ml steel reactor, equipped with magnetic stirrer. The so charged reactor is subjected to two cycles reaching the room temperature, condensation in liquid nitrogen, and evacuation at the pressure of 10^{-3} mbar to remove oxygen traces. At the end of these steps 25 atm of VDF are introduced into the reactor and then the system is maintained, under magnetic stirring, at the temperature of 57°C . After 6 hours the unreacted VDF is outgassed, obtaining 2.1 g of homopolymer equivalent to a 58% yield.

EXAMPLE 9 (comparative)

[0052] The peroxide having linear structure $[\text{CF}_3\text{CF}_2\text{CF}_2\text{COO}]_2$ is used as polymerization initiator in emulsion for preparing the VDF homopolymer.

[0053] 0.104 g of emulsifier and 10.431 g of bidistilled water and then, after a short stirring, 1 ml of a peroxide solution in $\text{CCl}_2\text{FCClF}_2$ solvent containing 0.15 mmoles of $[\text{CF}_3\text{CF}_2\text{CF}_2\text{COO}]_2$ are introduced into a 50 ml steel reactor, equipped with magnetic stirrer. The so charged reactor is subjected to two cycles reaching the room temperature, condensation in liquid nitrogen, and evacuation at the pressure of 10^{-3} mbar to remove oxygen traces. At the end of these steps 25 atm of VDF are introduced into the reactor and then the system is maintained, under magnetic stirring, at the temperature of 57°C . After 6 hours the unreacted VDF is outgassed, obtaining 0.5 g of homopolymer equivalent to a 14% yield.

EXAMPLE 10

[0054] The peroxide $[(\text{CF}_3\text{O})_2(\text{CF}_3)\text{CCOO}]_2$ obtained in Example 3 is used as polymerization initiator in emulsion for preparing the vinylidene fluoride homopolymer.

[0055] 0.108 g of emulsifier and 10.042 g of bidistilled water and then, after a short stirring, 1 ml of a peroxide solution in $\text{CCl}_2\text{FCClF}_2$ containing 0.15 mmoles of $[(\text{CF}_3)(\text{CF}_3\text{O})_2\text{CCOO}]_2$ are introduced into a 50 ml steel reactor, equipped with magnetic stirrer. The so charged reactor is subjected to two cycles reaching the room temperature, condensation in liquid nitrogen, and evacuation at the pressure of 10^{-3} mbar to remove oxygen traces. At the end of these steps 25 atm of VDF are introduced into the reactor and then the system is maintained, under magnetic stirring, at the temperature of 6°C . After 6 hours the unreacted VDF is outgassed, obtaining 2.8 g of homopolymer equivalent to a 78% yield.

EXAMPLE 11

[0056] In a 500 cc Hastelloy autoclave equipped with stirrer working at 800 rpm, after the vacuum has been made, 300 cc of water, 5.3 g per litre of water of an ammonium salified microemulsion prepared according to USP 4,864,006 in the name of the Applicant, are introduced in sequence.

[0057] Then the autoclave is heated up to 60°C , when it has reached the temperature 65 g of 2,2,3-trifluoro-4-trifluoromethoxy-1,3-dioxole (TTD) are introduced, then tetrafluoroethylene (TFE) is introduced until reaching 9 absolute bar of pressure. 0.6 g of the peroxide $[(\text{CF}_3)_2\text{CFCOO}]_2$ obtained in Example 1 dissolved in GALDEN® D80 are fed, the solution has a concentration of 0.1 g/cc.

[0058] After the reaction starting the pressure is maintained constant by feeding TTD and TFE in a ratio by weight TTD/TFE equal to 18.9. After 220 minutes the reaction is stopped and the latex is discharged.

[0059] The product is coagulated with HNO_3 , the polymer is dried in a stove at 120°C for 18 hours and then treated at 230°C for 2 hours.

Charaterization of the TTD/TFE copolymer

[0060] The molar composition of the monomers incorporated into the polymer is: 48% TTD, 52% TFE. All the polymer chain end groups are perfluorinated.

[0061] By the infrared spectrum in the absorption zone 1780-1880 it is found the substantial absence of carbonyl


and carboxyl groups.

[0062] The polymer is amorphous and shows a sole T_g of 106.4°C at the DSC analysis.

EXAMPLE 12

Synthesis of the compound (c-C₄F₇COO)₂

[0063]

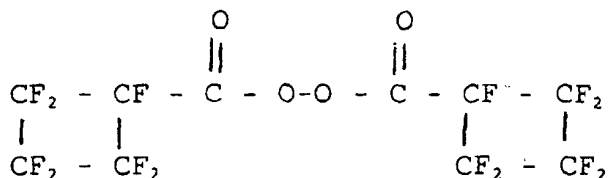

[0064] The synthesis procedure is equal to that used in Example 1 with the following quantitative modifications:
 30 mmol of c-C₄F₇COF (6.8 g), 33 mmol of NaOH (1.32 g), 10 ml of bidistilled water, 6.0 ml of H₂O₂ at 30% (60 mmol)
 and 30 ml of CCl₂FCClF₂ solvent. It is let react for 10 minutes, following the acylfluoride disappearance by IR analysis.
 The reaction yield is 55%.

Characterization of the compound (c-C₄F₇COO)₂

[0065] ¹⁹F NMR spectrum (with respect to CFCI₃ = 0) :
 -126 ppm 2F, -130 ppm 2F, -131 ppm 2F, -188 ppm 1F
 IR spectrum main bands (cm⁻¹) :
 intensity: (w) = weak; (m) = medium; (s) = strong; (vs) = very strong:
 1843 (m), 1817 (m), 1289 (s), 1232 (s)

Mass spectrum (E.I. Electronic Impact), main peaks and respective intensities:
 293 (25), 262 (12), 243 (20), 193 (29), 162 (47), 100 (100), 69 (37).

Decomposition constants

[0066] Decomposition constants K_d (sec⁻¹) and respective temperatures determined under anhydrous conditions
 (CCl₂FCClF₂ as solvent):
 K_d = 11 x 10⁻⁵ (70°C); 36 x 10⁻⁵ (80°C).

EXAMPLE 13

[0067] The perfluorodiacylperoxide [(CF₃)₂CFCOO]₂ obtained in Example 1 is used as polymerization initiator of the
 TTD (2,2,3-trifluoro-4-trifluoromethoxy-1,3-dioxol).

[0068] 9.3 g (44 mmol) of TTD and 0.044 mmol of [(CF₃)₂CFCOO]₂ dissolved in CCl₂FCClF₂ are introduced into a
 50 ml polymerisation glass reactor, equipped with magnetic stirrer. The so charged reactor is subjected to three cycles
 reaching thr room temperature, condensation in liquid nitrogen and evacuation at the pressure of 10⁻³ mbar to remove
 oxygen traces. At the end of these steps the system is maintained, under magnetic stirring, at the temperature of 57°C
 for 24 hours; then the same quantity of initiator is introduced in the reactor, and the system is let react for 24 hours a
 second time; the same operations are repeated the third day. After three days at 57°C, the unreacted monomer is
 removed, keeping the reactor at the temperature of 130°C and at the pressure of 10⁻³ mbar for one hour. 3,6 g of
 homopolymer are obtained, equivalent to a 39% yield.

Characterization of TTD hmopolymer


[0069] DSC: T_g = 176,1°C
 TGA: -1% 332°C, -2% 356°C, -10% 399°C, -50% 432°C

EXAMPLE 14 (comparative)

[0070] One proceeds as in Example 13, but using the peroxide $[\text{CF}_3\text{CF}_2\text{C}(\text{O})\text{O}]_2$ instead of the perfluorodiacylperoxide $[(\text{CF}_3)_2\text{CFCOO}]_2$ of the invention. While maintaining all other reaction parameters equal, except the reaction temperature (which is 27°C), 0,3 g of TTD homopolymer, equivalent to a yield of 5%, are obtained.

Claims


1. Perfluorodiacylperoxides having the following structures:

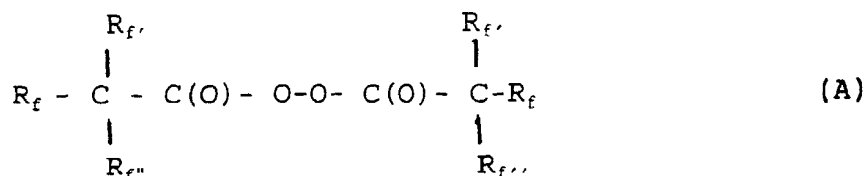

wherein:

when R_f is F, $\text{R}_{f'}$, $\text{R}_{f''}$ are both $-\text{CF}_3$;


when R_f is $-\text{CF}_3$, $\text{R}_{f'}$ and $\text{R}_{f''}$ are C_1 - C_3 linear or branched perfluorooxyalkyl groups;

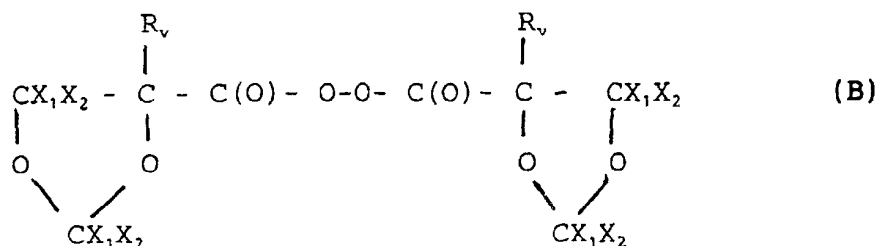

wherein:

R_v is selected from F, perfluorooxyalkyl, C_1 - C_3 linear or branched perfluoroalkyl;

X_1, X_2 are selected from F, perfluoroalkyl, C_1 - C_3 linear or branched perfluorooxyalkyl.

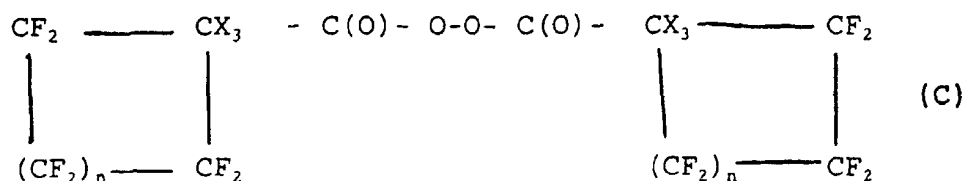


wherein:

$n = 1-3$

X_3 is selected from F, C_1 - C_3 linear or branched perfluoroalkyl, with the proviso that for $n = 3$, X_3 cannot be F; said perfluorodiacylperoxides meet the following condition: the thermal decomposition constants K_d (sec^{-1}) in the presence of water do not undergo substantial variations with respect to the thermal decomposition constants in absence of water.


2. A polymerization process of one or more fluorinated monomers wherein the perfluorodiacylperoxides according to claim 1 are used as polymerization initiators.

3. A polymerization process according to claim 2, wherein the polymerization is carried out in aqueous medium, in suspension, in emulsion or in microemulsion.
4. A polymerization process according to claims 2-3, wherein at temperatures of the order of 50°-80°C, the perfluorodiacylperoxides of structure (C) or the compound of structure (A) having the formula:

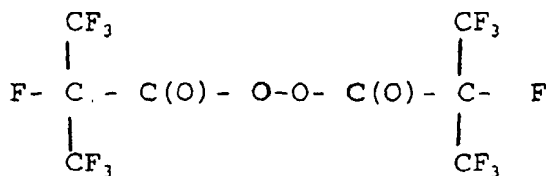

are used.

5. A polymerization process according to claims 2-3, wherein at temperatures of the order of -20° - +25°C, the perfluorodiacylperoxides of structure (A) of formula:

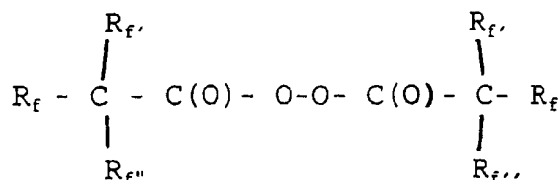


are used, wherein when R_f is $-\text{CF}_3$, $\text{R}_{f'}$ and $\text{R}_{f''}$ are C_1 - C_3 linear or branched perfluoroalkoxyalkyl groups.

6. A polymerization process according to claims 2-5, wherein the fluorinated monomers are selected from:
 - C_2 - C_8 perfluoroolefins, such as tetrafluoroethylene (TFE), hexafluoropropene (HFP);
 - C_2 - C_8 hydrogenated fluoroolefins, such as vinyl fluoride (VF), vinylidene fluoride (VDF), trifluoroethylene, $\text{CH}_2=\text{CH}-\text{R}_f$ perfluoroalkylethylene, wherein R_f is a C_1 - C_6 perfluoroalkyl, hexafluoroisobutene;
 - C_2 - C_8 chloro-fluoroolefins, such as chlorotrifluoroethylene (CTFE);
 - $\text{CF}_2=\text{CFOR}_f$ (per)fluoroalkylvinylethers (PAVE), wherein R_f is a C_1 - C_6 (per) fluoroalkyl, for example CF_3 , C_2F_5 , C_3F_7 ;
 - $\text{CF}_2=\text{CFOX}$ (per)fluoro-oxyalkylvinylethers, wherein X is: a C_1 - C_{12} alkyl, or a C_1 - C_{12} oxyalkyl, or a C_1 - C_{12} (per)fluoroalkoxyalkyl having one or more ether groups;
 - perfluorodioxoles, such as 2,2,4-trifluoro-5-trifluoromethoxy-1,3-dioxole (TTD), 2,2-bis-trifluoromethyl-4,5-difluoro-dioxole (PPD);
 - sulphonic monomers, such as $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{SO}_2\text{F}$;
 - fluorinated dienes such as $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{CF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCCl}_2\text{CF}_2\text{CF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCF}_2\text{OCF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCF}_2\text{OCCl}=\text{CF}_2$, $\text{CF}_2=\text{CFOC}(\text{CF}_3)_2\text{OCF}=\text{CF}_2$.
7. A polymerization process according to claims 2-6, wherein the perfluorodiacylperoxide initiator is fed in a continuous way or by a single addition at the starting of the polymerization.
8. A polymerization process according to claims 2-7, wherein the amount of perfluorodiacylperoxide initiator is in the range 0.0001%-5% by moles with respect to the amount of the fed monomers.

Patentansprüche


1. Perfluordiacylperoxide mit den folgenden Strukturen:

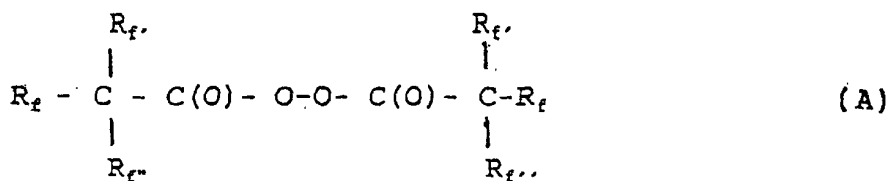

wobei:

wenn R_f gleich F ist, R_f und R_f beide $-CF_3$ sind;


wenn R_f gleich $-CF_3$ ist, R_f und R_f lineare oder verzweigte C_1 - C_3 -Perfluoroxyalkylreste sind;

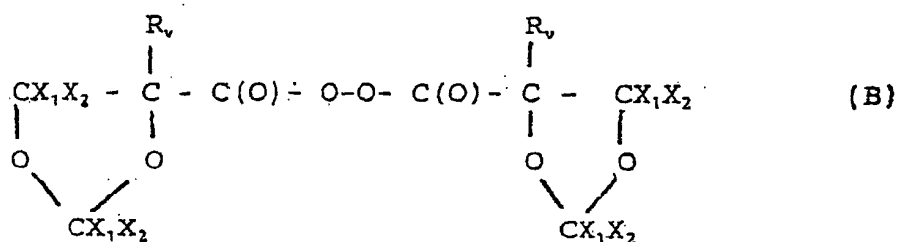

wobei:

R_v aus F, Perfluoroxyalkyl, linearem oder verzweigtem C_1 - C_3 -Perfluoralkyl ausgewählt ist;

X_1, X_2 aus F, Perfluoralkyl, linearem oder verzweigtem C_1 - C_3 -Perfluoroxyalkyl ausgewählt sind;

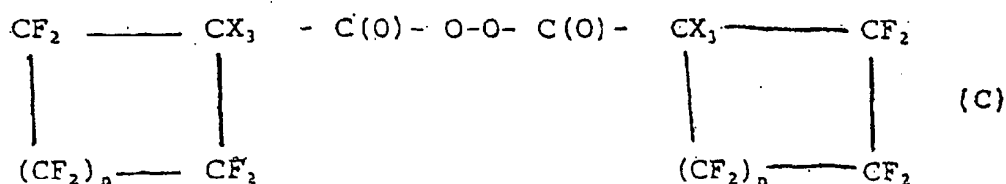

wobei:

$n = 1$ bis 3 ;


X_3 aus F, linearem oder verzweigtem C_1 - C_3 -Perfluoralkyl ausgewählt ist, mit der Maßgabe, daß für $n = 3$ X_3 nicht F sein kann;

wobei die Perfluordiacylperoxide die folgende Bedingung erfüllen: die thermischen Zersetzungskonstanten K_d (s^{-1}) in Gegenwart von Wasser erfahren, bezogen auf die thermischen Zersetzungskonstanten in Abwesenheit von Wasser, keine wesentlichen Veränderungen.

2. Verfahren zur Polymerisation eines oder mehrerer fluorierter Monomere, wobei die Perfluordiacylperoxide nach Anspruch 1 als Polymerisationsinitiatoren verwendet werden.


3. Polymerisationsverfahren nach Anspruch 2, wobei die Polymerisation in wäßrigem Medium, in Suspension, in Emulsion oder in Mikroemulsion durchgeführt wird.

4. Polymerisationsverfahren nach den Ansprüchen 2 bis 3, wobei bei Temperaturen in der Größenordnung von 50 bis $80^\circ C$ die Perfluordiacylperoxide der Struktur (C) oder die Verbindung der Struktur (A) mit der Formel:

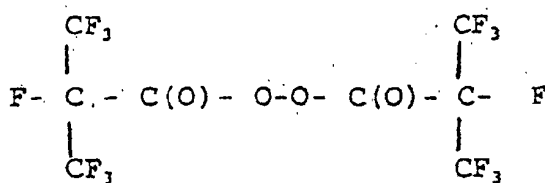

verwendet werden.

5. Polymerisationsverfahren nach den Ansprüchen 2 bis 3, wobei bei Temperaturen in der Größenordnung von -20 bis +25°C die Perfluordiacylperoxide der Struktur (A) mit der Formel:

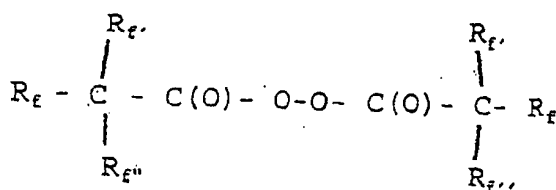

verwendet werden, wobei, wenn R_f gleich $-\text{CF}_3$ ist, R_f' und R_f'' lineare oder verzweigte C_1 - C_3 -Perfluoroxyalkylreste sind.

6. Polymerisationsverfahren nach den Ansprüchen 2 bis 5, wobei die fluorierten Monomere aus


- C_2 - C_8 -Perfluorolefinen, wie z.B. Tetrafluorethylen (TFE), Hexafluorpropen (HFP);
- hydrierten C_2 - C_8 -Fluorolefinen, wie z.B. Vinylfluorid (VF), Vinylidenfluorid (VDF), Trifluorethylen, $\text{CH}_2=\text{CH}-\text{R}_f$ -Perfluoralkylethylen, wobei R_f ein C_1 - C_6 -Perfluoralkyl ist, Hexafluorisobuten;
- C_2 - C_8 -Chlorfluorolefinen, wie z.B. Chlortrifluorethylen (CTFE);
- $\text{CF}_2=\text{CFOR}_f$ -(Per)fluoralkylvinylethern (PAVE), wobei R_f ein C_1 - C_6 -(Per)fluoralkyl, z.B. CF_3 , C_2F_5 , C_3F_7 , ist;
- $\text{CF}_2=\text{CFOX}$ -(Per)fluoroxyalkylvinylethern, wobei X bedeutet: ein C_1 - C_{12} -Alkyl oder ein C_1 - C_{12} -Oxyalkyl oder ein C_1 - C_{12} -(Per)fluoroxyalkyl mit einer oder mehreren Ethergruppen;
- Perfluordioxolen, wie z.B. 2,2,4-Trifluor-5-trifluormethoxy-1,3-dioxol (TTD), 2,2-Bis-trifluormethyl-4,5-difluordioxol (PPD);
- Sulfonsäuremonomeren, wie z.B. $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{SO}_2\text{F}$;
- fluorierten Dienen, wie z.B. $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{CF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCCl}_2\text{CF}_2\text{CF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCF}_2\text{OCF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCF}_2\text{OCCl}=\text{CF}_2$, $\text{CF}_2=\text{CFOC}(\text{CF}_3)_2\text{OCF}=\text{CF}_2$;

ausgewählt sind.

7. Polymerisationsverfahren nach den Ansprüchen 2 bis 6, wobei der Perfluordiacylperoxid-Initiator kontinuierlich oder durch einmalige Zugabe zu Beginn der Polymerisation zugeführt wird.
8. Polymerisationsverfahren nach den Ansprüchen 2 bis 7, wobei die Menge an Perfluordiacylperoxid-Initiator im Bereich von 0,0001 bis 5 Mol-%, bezogen auf die Menge der zugeführten Monomere, liegt.

Revendications


1. Peroxydes de perfluordiacyle ayant les structures suivantes :

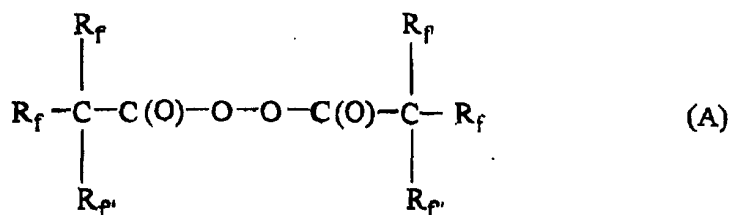

dans laquelle :

quand R_f est F, alors $R_{f'}$, $R_{f''}$ sont tous les deux $-CF_3$;


quand R_f est $-CF_3$, alors $R_{f'}$ et $R_{f''}$ sont des groupes perfluorooxyalkyle en C_1 à C_3 à chaîne droite ou ramifiée ;

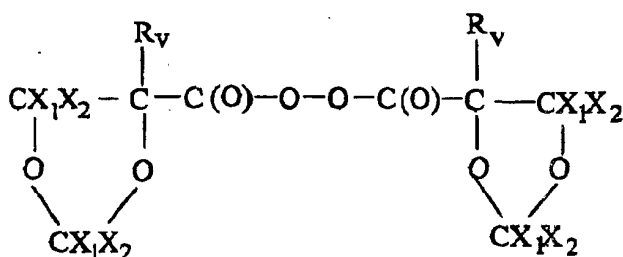

dans laquelle

R_v est choisi parmi F, les groupes perfluorooxyalkyle, perfluoroalkyle en C_1 à C_3 à chaîne droite ou ramifiée ;


X_1 et X_2 sont choisis parmi F, les groupes perfluorooxyalkyle, perfluoroalkyle en C_1 à C_3 à chaîne droite ou ramifiée ;

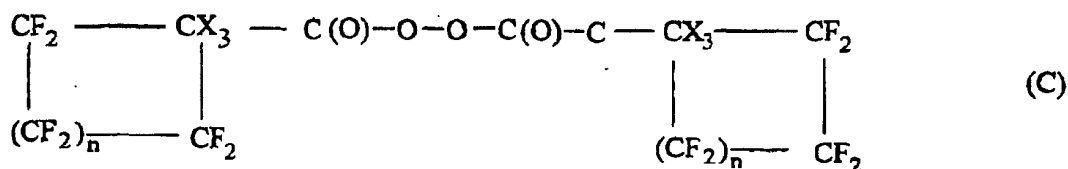


où n vaut 1 à 3,

X_3 est choisi parmi F, les groupes perfluoroalkyle en C_1 à C_3 à chaîne droite ou ramifiée, à la condition que, lorsque $n = 3$, alors X_3 ne puisse pas être F ; lesdits peroxydes de perfluorodiacyle satisfaisant à la condition suivante : les constantes de décomposition thermique K_d (s^{-1}) en présence d'eau ne doivent pas subir de variations importantes par rapport aux constantes de décomposition thermique en l'absence d'eau.

2. Procédé de polymérisation d'un ou plusieurs monomères fluorés, dans lequel on utilise en tant qu'amorceurs de polymérisation les peroxydes de perfluorodiacyle selon la revendication 1.
3. Procédé de polymérisation selon la revendication 2, dans lequel la polymérisation est mise en oeuvre dans un milieu aqueux, en suspension, en émulsion ou en micro-émulsion.
4. Procédé de polymérisation selon les revendications 2-3, dans lequel, à des températures de 50 à 80°C, on utilise les peroxydes de perfluorodiacyle de structure (C) ou encore le composé de structure (A) ayant la formule :

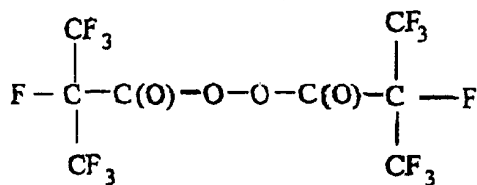

5. Procédé de polymérisation selon les revendications 2-3, dans lequel, à des températures de l'ordre de -20 à +25°C, on utilise les peroxydes de perfluorodiacyle de structure (A) de formule :

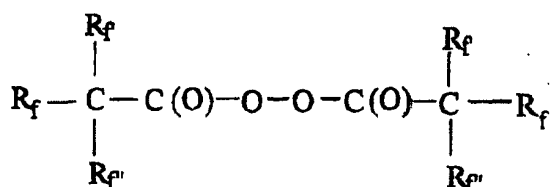

dans laquelle, quand R_f est $-\text{CF}_3$, alors R_f et $\text{R}_{f'}$ sont des groupes perfluorooxyalkyle en C_1 à C_3 à chaîne droite ou ramifiée,

6. Procédé de polymérisation selon les revendications 2-5, dans lequel les monomères fluorés sont choisis parmi :

- les perfluorooléfines en C_2 à C_8 telles que le tétratrafluoroéthylène (TFE), l'hexafluoropropène (HFP) ;
- les fluorooléfines hydrogénées en C_2 à C_8 , telles que le fluorure de vinyle (VF), le fluorure de vinylidène (VDF), le trifluoroéthylène, les perfluoroalkyléthylènes $\text{CH}_2=\text{CH}-\text{R}_f$ où R_f est un radical perfluoroalkyle en C_1 à C_6 , et l'hexafluoroisobutène ;
- chlorofluorooléfines en C_2 à C_8 telles que le chlorotrifluoroéthylène (CTFE) ;
- les (per)fluoroalkylvinyléthers (PAVE) $\text{CF}_2=\text{CFOR}_f$, dans lesquels R_f est un groupe (per)fluoroalkyle en C_1 à C_6 , par exemple CF_3 , C_2F_5 , C_3F_7 ;
- les (per)fluorooxyalkylvinyléthers $\text{CF}_2=\text{CFOX}$ dans lesquels X est un groupe alkyle en C_1 à C_{12} ou oxyalkyle en C_1 à C_{12} ou (per)fluorooxyalkyle en C_1 à C_{12} ayant un ou plusieurs groupes éther ;
- les perfluorodioxoles tels que le 2,2,4-trifluoro-5-trifluorométhoxy-1,3-dioxole (TTD), le 2,2-bistrifluorométhyle-4,5-difluorodioxole (PPD) ;
- les monomères sulfoniques tels que $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{SO}_2\text{F}$;
- les diènes fluorés tels que le $\text{CF}_2=\text{CFOCF}_2\text{CF}_2\text{CF}_2$, $\text{CF}_2=\text{CFOCCl}_2\text{CF}_2\text{CF}=\text{CF}_2$, le $\text{CF}_2=\text{CFOCF}_2\text{OCF}=\text{CF}_2$, $\text{CF}_2=\text{CFOCF}_2\text{OCCl}=\text{CF}_2$, $\text{CF}_2=\text{CFOC}(\text{CF}_3)_2\text{OCF}=\text{CF}_2$.

7. Procédé de polymérisation selon les revendications 2-6, dans lequel l'amorceur peroxyde de perfluorodiacyle est introduit d'une manière continue ou par une addition unique au début de la polymérisation.

8. Procédé de polymérisation selon les revendications 2-7, dans lequel la quantité de l'amorceur peroxyde de perfluorodiacyle est comprise dans la plage de 0,0001 à 5 % en moles par rapport à la quantité des monomères introduits.